



## Digital Thickness Gauges

### JD and FD Series

- Easy to read LCD display
- Highest accuracy
- User selectable units mm and inch
- Dial gauge: Sylvac S 229
- RS 232 output for data-collection
- Includes swing-out foot for on-table operation (Model JD-200-25 only)

### Accessory:


**Model J-CC:** RS 232 connecting cable with 9 pin plug to connect the gauge with a computer; it comes with a Windows program (Win '98) to transfer the data to the PC and to store them as an Excel file.



Model JD-50



Model FD-50

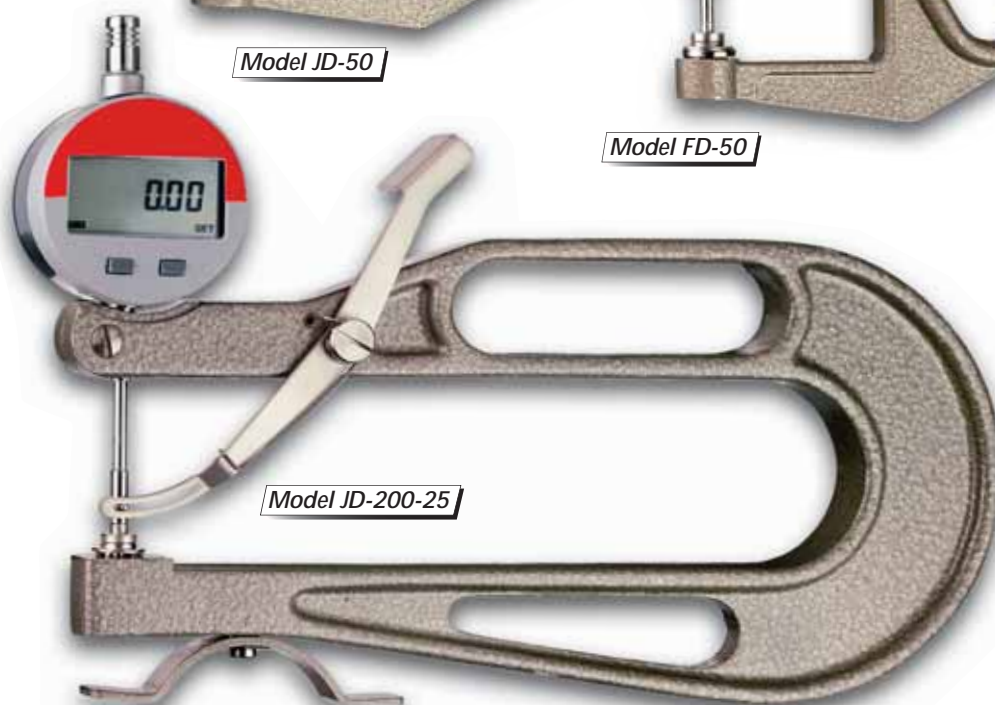

Model JD-200-25

Specifications	Model JD-50	Model JD-200-25	Model FD-50	Model FD-200-25
Resolution:	0.01 mm / 0.001 inch	0.01 mm / 0.001 inch	0.001 mm / 0.0001 inch	0.001 mm / 0.0001 inch
Measuring range:	10 mm / 0.4 inch	25 mm / 1 inch	10 mm / 0.4 inch	25 mm / 1 inch
Depth of jaws:	50 mm	200 mm	50 mm	200 mm
Shape of jaws:	Same as Model J-50	Same as Model K-200	Same as Model J-50	Same as Model J-200
Measuring pressure:	< 1.4 N		< 1.4 N	
Feeler shape*:	a/b/c/d/e		a/b/c/d/e	
Display:	LCD 6 digit, 8.5 mm high		LCD 6 digit, 8.5 mm high	
Measuring principle:	Capacitive (Sylvac)		Capacitive (Sylvac)	
Temperature range:	10 - 45 °C		10 - 45 °C	
Battery:	3 V Lithium, CR 2032		3 V Lithium, CR 2032	
Data output:	RS 232, galvanic isolation		RS 232, galvanic isolation	
Lifting device:	○	○	○	○
Weight, net:	300g	700g	300g	1000g

\* To order, please indicate the desired feeler, e.g. JD-200-25-D for gauge with feeler »d«.