



## Dielectric Strength Tester Model 6303

### Friborg Test Technology AB

#### Mail address

P.O. Box 63  
SE-196 22 Kungsängen  
Sweden

#### Visiting address

Kraftvägen 32  
SE-196 37 Kungsängen  
Sweden

T: +46 (0) 8 581 610 10  
F: +46 (0) 8 505 961 50

info@friborg.se  
www.friborg.se


The apparatus is deemed to comply with the requirements, if the insulation resistance measured after 1 minute is not less than the values given in table 5 and no flash-over or breakdown occurs during the dielectric strength test.

When testing enclosures of insulating material, a metal foil is pressed tightly against accessible parts.

For more information please see IEC Standard 60065/2001 clause 10.3.2

### Specifications

- Vertical bar diameter 5mm
- Weight of bar + handle 100 gram
- Design of isolation material
- Electrical terminals for connection (2)
- Certificate issued by Friborg Test Technology

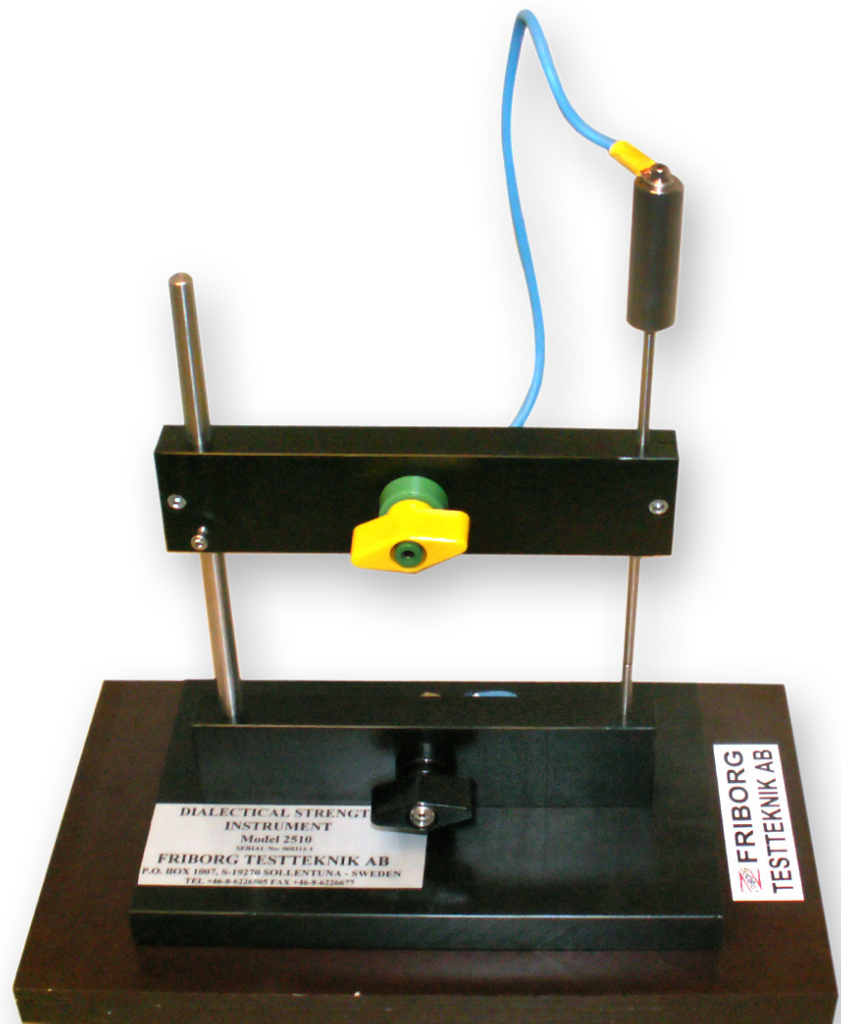

### Facts

IEC:  
60065/2001 Clause 10.3.2

Components:  
-

Weight:  
1 kg

Dimensions:  
400x200x300 mm (LxWxH)

Supply  
-