
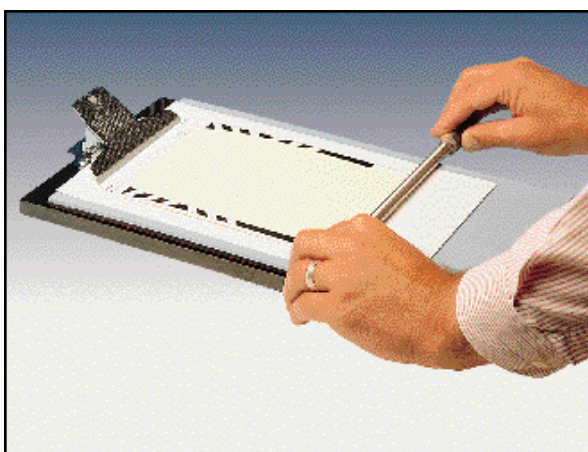


# K HAND COATER

The K Hand Coater provides a simple but effective means of applying paints, printing inks, lacquers, adhesives and other surface coatings onto many substrates including paper, board, plastic films, foils, metal plates, glass plates, wood etc. Two or more coatings can be applied side-by-side in a single operation making the system ideal for comparing products.

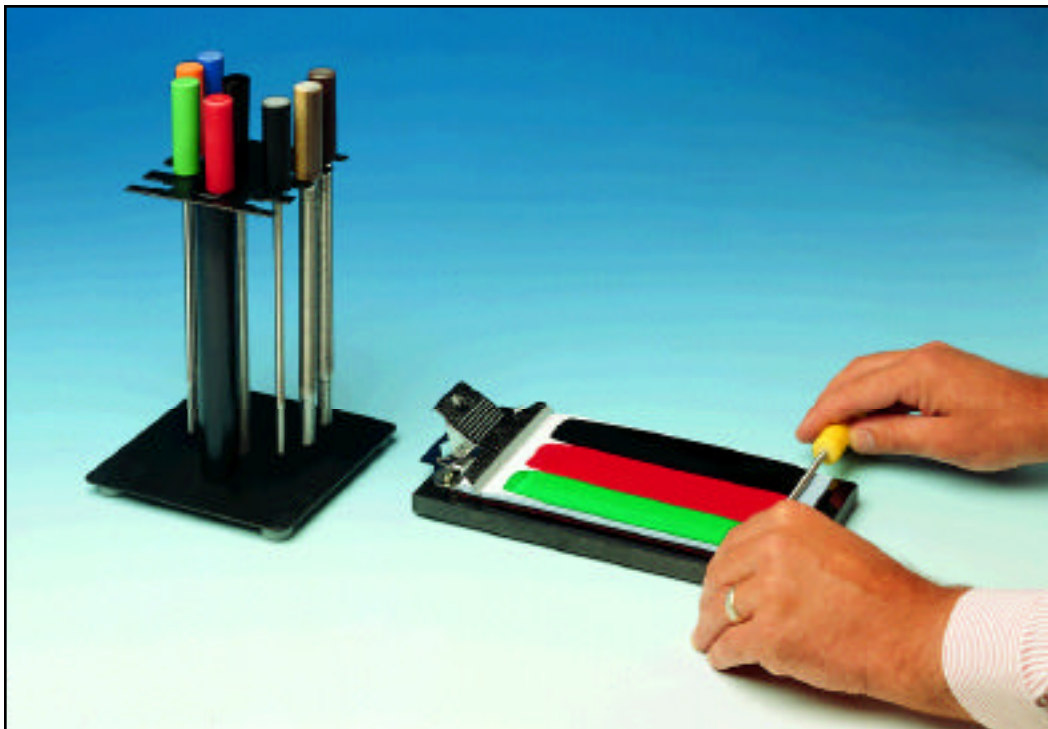

▲ Small K Hand Coater with cleaning/storage rack. Three liquid inks being applied simultaneously.

◀ Large K Hand Coater applying paint to a standard test card.


## MAIN FEATURES

- Simple, economical.
- Will deposit from 4 to 500 micron wet film thickness.
- Good repeatability with special impression bed.
- Stainless steel rods and wire used for K Bars.
- K Bars are numbered and colour coded.
- Two or more products coated simultaneously for comparison.

## K BAR COATING


Wired K Bars are produced by winding precision drawn stainless steel wire onto a stainless steel rod resulting in a pattern of identically shaped grooves. These grooves precisely control the wet film thickness. Close wound bars will produce coating thicknesses from 4 to 120µm. Still higher coating weights up to 500µm can be obtained using spirally wound bars.

## STANDARD K BARS



Close Wound

BAR No.	COLOUR CODE	WIRE DIAMETER		WET FILM DEPOSIT	
		INS	MM	INS	µm
0	White	0.002	0.05	0.00015	4
1	Yellow	0.003	0.08	0.00025	6
2	Red	0.006	0.15	0.0005	12
3	Green	0.012	0.31	0.0010	24
4	Black	0.020	0.51	0.0015	40
5	Horn	0.025	0.64	0.0020	50
6	Orange	0.030	0.76	0.0025	60
7	Brown	0.040	1.00	0.0030	80
8	Blue	0.050	1.27	0.0040	100
9	Tan	0.060	1.50	0.0050	120



Spirally Wound

BAR No.	WIRE DIAMETER		WET FILM DEPOSIT	
	INS	MM	INS	µm
150	0.010	0.25	0.006	150
200	0.014	0.36	0.008	200
300	0.020	0.51	0.012	300
400	0.030	0.76	0.016	400
500	0.040	1.00	0.020	500

Special K Bars to apply intermediate wet film deposits are manufactured to customer requirements. We stock wire diameters giving the choice of the following deposits (microns) when close wound.

4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 76, 80, 84, 88, 90, 92, 96, 100, 104, 108, 110, 112, 116, 120, 128, 130, 140, 150.

We also manufacture both wired metering bars and plain smoothing bars to fit all laboratory and production width coaters.

## ORDERING

### Small Starter Set:

- 1 small impression bed (coating area 11 x 18cm)
- 8 short K Bars (specify bar nos)
- 1 short cleaning/storage rack
- 500 sheets proofing paper 12 x 21cm

Alternatively, all items can be ordered individually.

### Large Starter Set:

- 1 large impression bed (coating area 22 x 34cm)
- 8 long K Bars (specify bar nos)
- 1 long cleaning/storage rack
- 500 sheets proofing paper 18 x 31cm



With just a little practice, K Hand Coaters produce a uniform and repeatable coating. However, for those users where repeatability is critical (e.g. when used for computer colour matching) or when a number of operators will be carrying out the test work, we have developed the K Control Coater illustrated left. This automatic machine (detailed on a separate leaflet) has variable speed and a constant pressure exerted between the bar and substrate.

For more information contact...

**RK**

R K Print Coat Instruments Ltd.  
 Littleton, Royston, Herts, SG8 0OZ  
 United Kingdom  
 Tel. +44 (0)1763 852187  
 Fax. +44 (0)1763 852502  
 email. sales@rkprint.com  
 www.rkprint.com